



## FRONT LED LIGHT

# 55600

## Technical data

<b>Volt</b>	10-30V DC	<b>Wire lenght</b>	18 cm
<b>Waterproof</b>	IP67 e IP69K	<b>Lens</b>	Glass
<b>Colour temp.</b>	6000-6500K	<b>Housing</b>	aluminium
<b>Working temp</b>	-40°C a +60°C		

Beam	Watt	Corrente	Lumen effettivi	N. LED
High beam	34W	5mA	2200LM	1+1
Low beam	17W		1200LM	1
Position light	5W		-	18
Indicator light	15W		-	32

### Features:

#### Movable indicator (Rh/Lh/Up)



#### Heated lens



#### High beam



#### Position/Indicator

#### Position


#### Low beam




### Tecnichal drawing

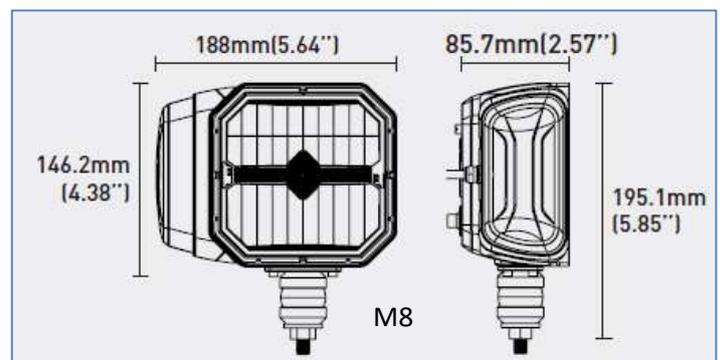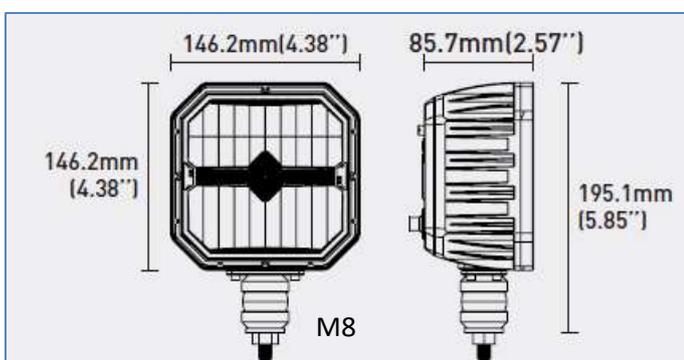

## Luminous flux

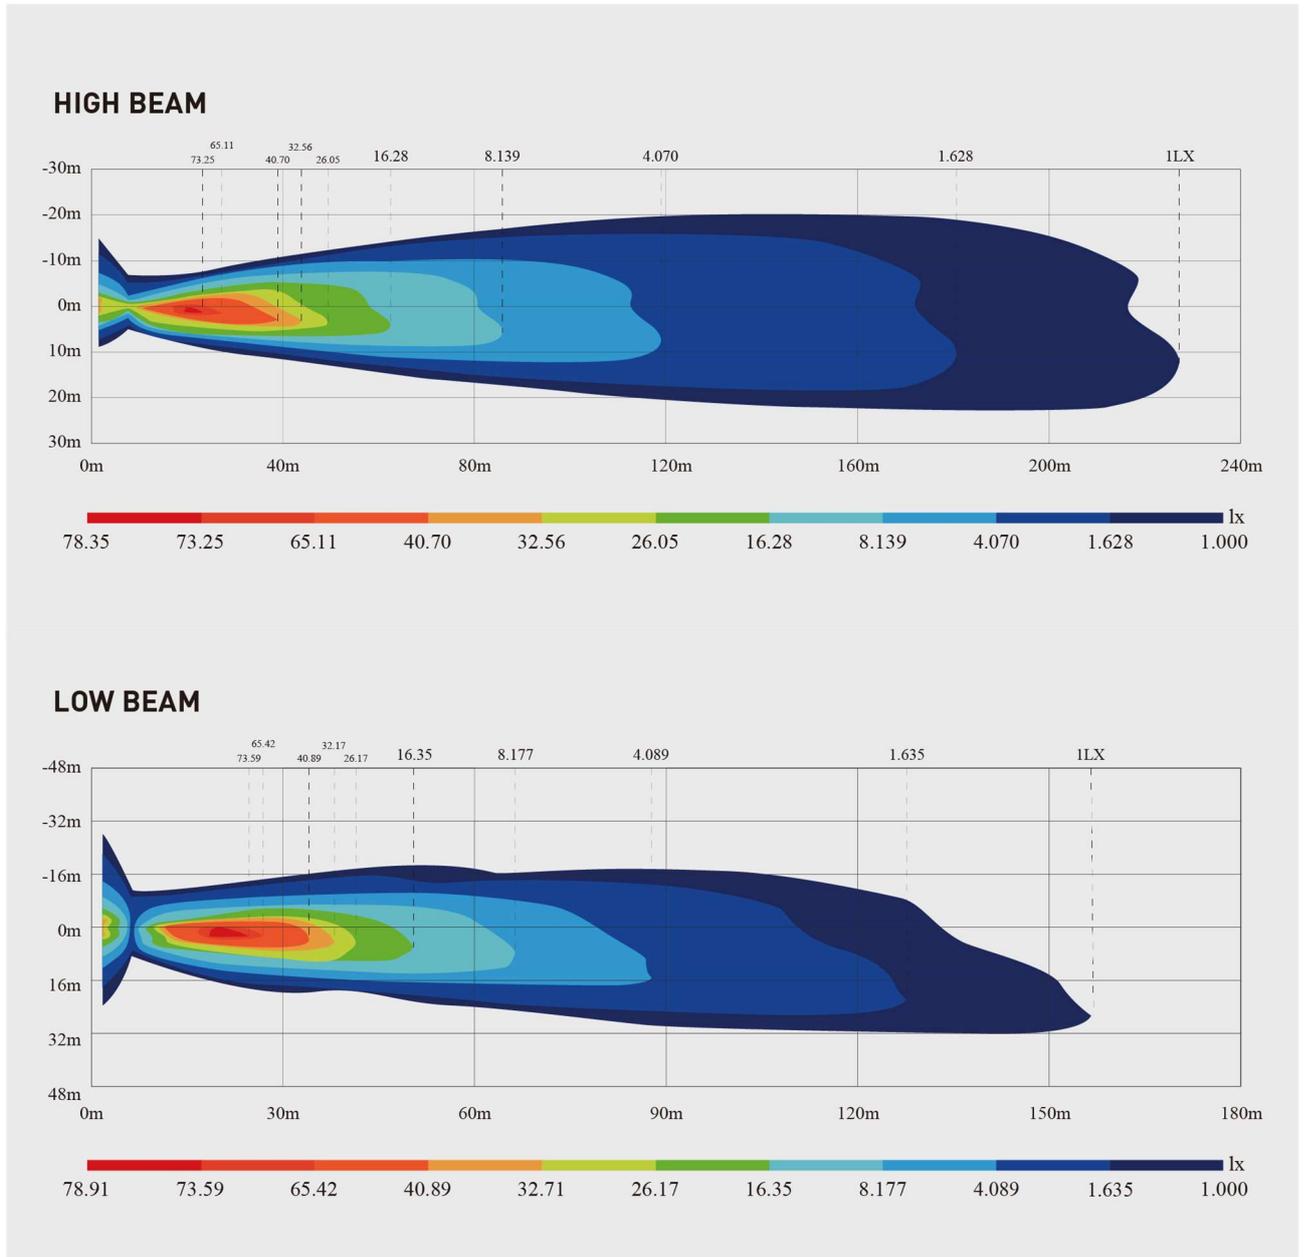

## Connection mode

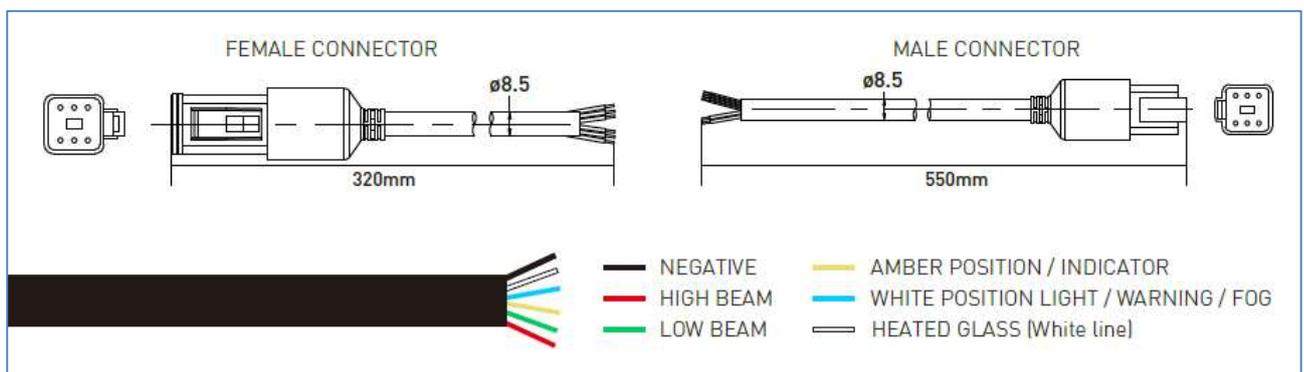


## Installation

### Indicator installation:



Put the two rubber parts into the side of the indicator

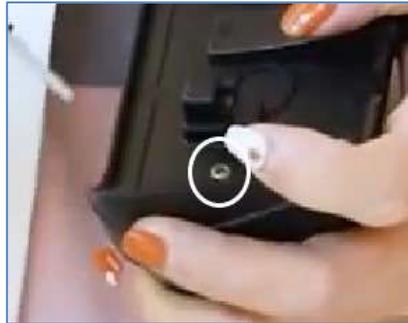

Fix rubber parts with smaller screws



Insert the black screws



Place the indicator on the light, inserting the arrow screws in the corresponding holes on the light



Screw and connect the indicator connector with the light connector

## Bracket installation



Install the bracket at the bottom of the headlight



Insert the main screw to the bracket



Screw the bracket using the screws provided



Install the ring and cap in the main screw



Continue inserting the other two caps

## Disposal

The crossed-out wheeled bin symbol, in accordance with Directive 2012/19 /EU, shown on the appliance indicates that the product, at the end of its useful life, having to be treated separately from household waste, must be sent to a separate collection center for electrical and electronic equipment. For information on the collection points of the equipment to be scrapped, contact your local municipality or local disposal services. The plastic materials can be recycled separately.

